

2111
TRW

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICANT(s): Strong
SERIAL NO.: 09/967,121 ART UNIT: 2111
FILED: September 28, 2001 EXAMINER: Cleary
TITLE: Data Transmission Method and Apparatus
ATTORNEY DOCKET NO.: 060B.0001.U1(US)

Commissioner For Patents
P. O. Box 1450
Alexandria, VA 22313-1450

Transmittal Of Certified Copy

Sir:

Applicant(s) claim the benefit of the following prior foreign patent application under 35 U.S.C. §119 for the above-identified U.S. patent application:

Country: PCT
Application No.: PCT/GB00/01341
Filing Date: April 10, 2000

Attached is a certified copy of the foreign application from which priority is claimed.

Respectfully submitted,

David M. O'Neill (35,304) August 9, 2005
David M. O'Neill (Reg. No. 35,304) Date

Customer No.: 29683
Harrington & Smith, LLP
4 Research Drive
Shelton, CT 06484-6212
203-925-9400

CERTIFICATE OF MAILING

I hereby certify that this correspondence is being deposited with the United States Postal Service as first class mail on the date shown below in an envelope addressed to: Assistant Commissioner For Patents, Alexandria, VA 22313-1450.

8/9/05
Date

Ann Okrentowich
Ann Okrentowich

THIS PAGE BLANK (USPTO)



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation and Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents held on an international application filed on 10th April 2000 under the Patent Cooperation Treaty at the Receiving Office. The application was allocated the number **PCT/GB00/01341**

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in the certificate and any accompanying documents has re-registered under the Companies Act 1985 with the same name as that with which it was registered immediately before re-registration, for the substitution as, or the inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Date: July 5, 2005

**CERTIFIED COPY OF
PRIORITY DOCUMENT**

THIS PAGE BLANK (USPTO)

PCT

REQUEST

The undersigned requests that the present international application be processed according to the Patent Cooperation Treaty.

For receiving office use only

International Application No.

PCT/GB 00 / 01341

International Filing Date

10 APRIL 2000

10 OCT 00

United Kingdom Patent Office
PCT International Application

Name of receiving Office and "PCT International Application"

Applicant's or agent's file reference
(if desired) (12 characters maximum)

P8806.WO JMP.KT

Box No. I TITLE OF INVENTION

DATA TRANSMISSION METHOD AND APPARATUS

Box No. II APPLICANT

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (i.e. country) of residence if no State of residence is indicated below.)

nSine Ltd
Apex Plaza
Forbury Road
Reading
RG1 1AX

GB

☐ This person is also inventor.

Telephone No.

Facsimile No.

Teleprinter No.

State (i.e. country) of nationality:

GB

State (i.e. country) of residence:

GB

This person is applicant for the purposes of:

☐ all designated States

☒ all designated States except the United States of America

☐ the United States of America only

☐ the States indicated in the Supplemental Box

Box No. III FURTHER APPLICANT(S) AND/OR (FURTHER) INVENTOR(S)

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (i.e. country) of residence if no State of residence is indicated below.)

Strong, Peter
Mayhill Lodge
Mayhill
Longhope
GL17 0RF

GB

This person is:

☐ applicant only

☒ applicant and inventor

☐ inventor only (if this check-box is marked, do not fill in below)

State (i.e. country) of nationality:

GB

State (i.e. country) of residence:

GB

This person is applicant for the purposes of:

☐ all designated States

☐ all designated States except the United States of America

☒ the United States of America only

☐ the States indicated in the Supplemental Box

☐ Further applicant and/or (further) inventors are indicated on a continuation sheet

Box No. IV AGENT OR COMMON REPRESENTATIVE; OR ADDRESS FOR CORRESPONDENCE

The person identified below is hereby/has been appointed to act on behalf of the applicant(s) before the competent international Authorities as:

☒ agent

☐ common representative

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country.)

POTTER, JULIAN MARK
D YOUNG & CO
21 New Fetter Lane
London
EC4A 1DA
GB

Telephone No.

Facsimile No.

020 7353 7777

Teleprinter No.

020 7353 4343

☐ Mark this check-box where no agent or common representative is/has been appointed and the space above is used instead to indicate a special address to which correspondence should be sent.

THIS PAGE BLANK (USPTO)

Box No. V DESIGNATION OF STATES

following designations are hereby made under Rule 4.9(a) (mark the applicable check-boxes; at least one must be marked):

Regional Patent

- ☒ **AP** ARIPO Patent: GH Ghana, GM Gambia, KE Kenya, LS Lesotho, MW Malawi, SD Sudan, SZ Swaziland, UG Uganda, ZW Zimbabwe, and any other State which is a Contracting State of the Harare Protocol and of the PCT
- ☒ **EA** Eurasian Patent: AM Armenia, AZ Azerbaijan, BY Belarus, KG Kyrgyzstan, KZ Kazakhstan, MD Republic of Moldova, RU Russian Federation, TJ Tajikistan, TM Turkmenistan, and any other State which is a Contracting State of the Eurasian Patent Convention and of the PCT
- ☒ **EP** European Patent: AT Austria, BE Belgium, CH and LI Switzerland and Liechtenstein, CY Cyprus, DE Germany, DK Denmark, ES Spain, FI Finland, FR France, GB United Kingdom, GR Greece, IE Ireland, IT Italy, LU Luxembourg, MC Monaco, NL Netherlands, PT Portugal, SE Sweden, and any other State which is a Contracting State of the European Patent Convention and of the PCT
- ☒ **OA** OAPI Patent: BF Burkina Faso, BJ Benin, CF Central African Republic, CG Congo, CI Côte d'Ivoire, CM Cameroon, GA Gabon, GN Guinea, GW Guinea-Bissau, ML Mali, MR Mauritania, NE Niger, SN Senegal, TD Chad, TG Togo, and any other State which is a member State of OAPI and a Contracting State of the PCT (if other kind of protection or treatment desired, please specify on dotted line)

National Patent (if other kind of protection or treatment desired, specify on dotted line):

- | | |
|---|---|
| <input checked="" type="checkbox"/> AL Albania | <input checked="" type="checkbox"/> LS Lesotho |
| <input checked="" type="checkbox"/> AM Armenia | <input checked="" type="checkbox"/> LT Lithuania |
| <input checked="" type="checkbox"/> AT Austria | <input checked="" type="checkbox"/> LU Luxembourg |
| <input checked="" type="checkbox"/> AU Australia | <input checked="" type="checkbox"/> LV Latvia |
| <input checked="" type="checkbox"/> AZ Azerbaijan | <input checked="" type="checkbox"/> MD Republic of Moldova |
| <input checked="" type="checkbox"/> BA Bosnia and Herzegovina | <input checked="" type="checkbox"/> MG Madagascar |
| <input checked="" type="checkbox"/> BB Barbados | <input checked="" type="checkbox"/> MK The former Yugoslav Republic of Macedonia |
| <input checked="" type="checkbox"/> BG Bulgaria | <input checked="" type="checkbox"/> MN Mongolia |
| <input checked="" type="checkbox"/> BR Brazil | <input checked="" type="checkbox"/> MW Malawi |
| <input checked="" type="checkbox"/> BY Belarus | <input checked="" type="checkbox"/> MX Mexico |
| <input checked="" type="checkbox"/> CA Canada | <input checked="" type="checkbox"/> NO Norway |
| <input checked="" type="checkbox"/> CH AND LI Switzerland and Liechtenstein | <input checked="" type="checkbox"/> NZ New Zealand |
| <input checked="" type="checkbox"/> CN China | <input checked="" type="checkbox"/> PL Poland |
| <input checked="" type="checkbox"/> CU Cuba | <input checked="" type="checkbox"/> PT Portugal |
| <input checked="" type="checkbox"/> CZ Czech Republic | <input checked="" type="checkbox"/> RO Romania |
| <input checked="" type="checkbox"/> DE Germany | <input checked="" type="checkbox"/> RU Russian Federation |
| <input checked="" type="checkbox"/> DK Denmark | <input checked="" type="checkbox"/> SD Sudan |
| <input checked="" type="checkbox"/> EE Estonia | <input checked="" type="checkbox"/> SE Sweden |
| <input checked="" type="checkbox"/> ES Spain | <input checked="" type="checkbox"/> SG Singapore |
| <input checked="" type="checkbox"/> FI Finland | <input checked="" type="checkbox"/> SI Slovenia |
| <input checked="" type="checkbox"/> GB United Kingdom | <input checked="" type="checkbox"/> SK Slovakia |
| <input checked="" type="checkbox"/> GD Grenada | <input checked="" type="checkbox"/> SL Sierra Leone |
| <input checked="" type="checkbox"/> GE Georgia | <input checked="" type="checkbox"/> TJ Tajikistan |
| <input checked="" type="checkbox"/> GH Ghana | <input checked="" type="checkbox"/> TM Turkmenistan |
| <input checked="" type="checkbox"/> GM Gambia | <input checked="" type="checkbox"/> TR Turkey |
| <input checked="" type="checkbox"/> HR Croatia | <input checked="" type="checkbox"/> TT Trinidad and Tobago |
| <input checked="" type="checkbox"/> HU Hungary | <input checked="" type="checkbox"/> UA Ukraine |
| <input checked="" type="checkbox"/> ID Indonesia | <input checked="" type="checkbox"/> UG Uganda |
| <input checked="" type="checkbox"/> IL Israel | <input checked="" type="checkbox"/> US United States of America |
| <input checked="" type="checkbox"/> IN India | <input checked="" type="checkbox"/> UZ Uzbekistan |
| <input checked="" type="checkbox"/> IS Iceland | <input checked="" type="checkbox"/> VN Viet Nam |
| <input checked="" type="checkbox"/> JP Japan | <input checked="" type="checkbox"/> YU Yugoslavia |
| <input checked="" type="checkbox"/> KE Kenya | <input checked="" type="checkbox"/> ZW Zimbabwe |
| <input checked="" type="checkbox"/> KG Kyrgyzstan | |
| <input checked="" type="checkbox"/> KP Democratic People's Republic of Korea | |
| <input checked="" type="checkbox"/> KR Republic of Korea | |
| <input checked="" type="checkbox"/> KZ Kazakhstan | |
| <input checked="" type="checkbox"/> LC Saint Lucia | |
| <input checked="" type="checkbox"/> LK Sri Lanka | |
| <input checked="" type="checkbox"/> LR Liberia | |

Check-boxes reserved for designating States (for the purposes of a national patent) which have become party to the PCT after the issuance of this sheet:

- ☒ **AE** United Arab Emirates
- ☒ **ZA** South Africa

Precautionary Designation Statement: In addition to the designations made above, the applicant also makes under Rule 4.9(b) all other designations which would be permitted under the PCT except any designation(s) indicated in the Supplemental Box as being excluded from the scope of this statement. The applicant declares that those additional designations are subject to confirmation and that any designation which is not confirmed before the expiration of 15 months from the priority date is to be regarded as withdrawn by the applicant at the expiration of that time limit. (Confirmation of a designation consists of the filing of a notice specifying that designation and the payment of the designation and confirmation fees. Confirmation must reach the receiving Office within the 15-month time limit.)

THIS PAGE BLANK (USPTO)

Box No. VI PRIORITY CLAIM

Further priority claims are indicated in the Supplemental Box

The priority of the following earlier application(s) is hereby claimed:

Filing Date of earlier application (day/month/year)	Number of earlier application	Where earlier application is:		
		national application: country	regional application: * regional Office	international application: receiving Office
item (1) 10 Apr 1999 10/4/1999	99 08105.1	GB		
item (2)				
item (3)				

- ☒ The receiving Office is hereby requested to prepare and transmit to the International Bureau a certified copy of the earlier application(s) (only if the earlier application was filed with the Office which for the purposes of the present international application is the receiving Office) identified above as item(s): 1

* Where the earlier application is an ARIPO application, it is mandatory to indicate in the Supplemental Box at least one country party to the Paris Convention for the Protection of Industrial Property for which that earlier application was filed (Rule 4.10(b)(ii)). See Supplemental Box.

Box No. VII INTERNATIONAL SEARCHING AUTHORITY

Choice of International Searching Authority (ISA)
(If two or more International Searching Authorities are competent to carry out the international search, indicate the Authority chosen; the two-letter code may be used):

ISA / EPO

Request to use results of earlier search; reference to that search (if an earlier search has been carried out by or requested from the International Searching Authority):

Date (day/month/year)

Number:

Country (or regional Office):

Box No. VII CHECK LIST; LANGUAGE OF FILING

This international application contains the following number of sheets:

request : 3 ✓
description (excluding sequence listing part) : 14 ✓
claims : 5 ✓
abstract : 1 ✓
drawings : 5 ✓
sequence listing part of description :
Total number of : 28 ✓

This international application is accompanied by the item(s) marked below:


- ☒ fee calculation sheet
- ☐ separate signed power of attorney
- ☐ copy of general power of attorney; reference number, if any:
- ☐ statement explaining lack of signature
- ☐ priority documents(s) identified in Box No. VI as item(s):
- ☐ translation of international application into (language):
- ☐ separate indications concerning deposited microorganism or other biological material
- ☐ nucleotide and/or amino acid sequence listing in computer readable form
- ☐ other (specify):

Figure of the drawings which should accompany the abstract:

Language of filing of the international application:

Box No. IX SIGNATURE OF APPLICANT OR AGENT

Next to each signature, indicate the name of the person signing and the capacity in which the person signs (if such capacity is not obvious from reading the request)



JULIAN MARK POTTER - AGENT FOR THE APPLICANT

1. Date of actual receipt of the purported international application: 10 APRIL 2000 10 04 00		2. Drawings: <input checked="" type="checkbox"/> received: <input type="checkbox"/> not received:
3. Corrected date of actual receipt due to later but timely received papers or drawings completing the purported international application:		
4. Date of timely receipt of the required corrections under PCT Article 11(2):		
5. International Searching Authority specified by the applicant: ISA /	6. <input type="checkbox"/> Transmittal of search copy delayed until search fee paid	

For International Bureau use only

Date of receipt of the record copy by the International Bureau:

THIS PAGE BLANK (USPTO)

DATA TRANSMISSION METHOD AND APPARATUS

The present application relates to a method and apparatus for transmitting a data messages in a data network including a plurality of stations interconnected by a bus line. The invention relates particularly, but not exclusively, to a method and apparatus for transmitting data between computers interconnected by electrical power lines.

A method for operating a data processing arrangement for motor vehicles in which the data processing arrangement includes at least two computers and a bus line connecting the computers for transmitting data messages is disclosed in US Patent No 5 001 642 and US Patent No 5 524 213. The method disclosed in the above-mentioned US Patents operates according to a protocol known as CAN (Controller Area Network), the details of which are disclosed in ISO (International Standards Organisation) Specification No 11898.

A data message of known type is shown in Figure 1. The data message includes a start of frame part (1) which indicates to the data network that a message has started, and an arbitration field (2) which determines the priority of the message when two or more nodes of the network are contending for the data bus. In a first version, the arbitration field (2) contains an 11 bit identifier (3) and a remote transmission request (RTR) bit (4), which is dominant for data frames and recessive for remote frames (the significance of which will be described below). Alternatively, in a second version, the identifier (3) can be a 29 bit identifier containing 2 bits substitute remote request (SRR) and identifier extension (IDE). The SRR bit gives priority to the

version discussed above if, on a network carrying messages of both versions, both messages have the same 11 bit identifier. The IDE bit (6) differentiates between 29 bit identifiers (which are recessive) and 11 bit identifiers (which are dominant).

The data message also includes a control field (7) which contains for the first version discussed above the identifier extension bit plus one reserved bit (r0), both set to dominant, and a 4 bit data length code (DLC) part which represents the number of bytes in a data field (8) of the message. In the second version, the control field 7 also includes 2 reserved bits (r1 and r0) which are set to dominant, and a 4 bit data length code, also representing the number of bytes in the data field (8). The data field (8) contains zero to eight bytes of data.

Following the data field (8), a CRC (Cyclic Redundancy Check) field (9) contains a 15-bit checksum calculated on the significant parts of the message and is used for error detection. An acknowledgement slot (10) then follows the CRC field (9). Any controller that has been able to correctly receive the data message sends an acknowledgement bit during the acknowledgement bit time, and the device transmitting the message checks for the presence of the acknowledgement bit. If an acknowledgement bit is detected, the next data frame is sent, but if no acknowledgement bit is detected, the device re-transmits the data frame. Prior to re-transmission, the node transmits an error frame, then waits for 8 times the frame bit rate period before re-transmitting.

Figure 2 shows a remote frame for use with the ~~CAN~~ data frame shown in Figure 1, and parts common to the frame of Figure 1 are denoted by like reference numerals but increased by 100. The remote frame is similar to the data frame in that it incorporates a start of frame 101, an arbitration field 102 having an identifier 103, a control field 107, a CRC field 109

and an acknowledgement slot 110. However, the remote frame does not contain a data field, and the RTR bit in the arbitration field is recessive for the purpose of explicitly marking the frame as a remote frame.

The purpose of the remote frame is to solicit the transmission of the corresponding data frame. For example, if a node A transmits a remote frame with its arbitration field 102 set to 234, then node B, if properly initialised, may respond with a data frame having its arbitration field (2) also set to 234.

Figure 3 shows an error frame for use in the network on which the frames of Figures 1 and 2 are transmitted. The error frame is transmitted when a node detects a fault, and causes all other nodes to detect a fault so that they also send error frames. The message transmitter then automatically tries to re-transmit the message, and a scheme of error counters ensures that a node is unable to destroy the traffic on the data bus by repeatedly transmitting error frames.

The error frame includes an error flag (20) consisting of 6 bits of the same value (which thus violates the bit-stuffing rule, as will be familiar to persons skilled in the art), and an error delimiter (21) comprising 8 recessive bits. The error delimiter provides a space in which other nodes on the bus can send their error flags when they detect the first error flag. Finally, an overload frame (not shown) may be used, and is similar in format to the error frame discussed above. The overload frame is transmitted by a node that becomes too busy.

The prior art arrangement discussed above suffers from the drawback that the rate at which data can be reliably transmitted across the network is limited by the distances the data must travel between nodes of the network. When messages consisting of small amounts of data are transmitted across small distances (for example data representing physical measurements in a motor vehicle transmitted around a data bus

located in the vehicle) this does not cause any significant difficulty. However, if larger amounts of data need to be transmitted over larger distances (for example transmission of large amounts of data between computers separated by significant distances), then the rate at which data can be transmitted prevents the prior art arrangement discussed above from being practicable. In particular, the prior art arrangement discussed above can only transmit a maximum of 8 bytes per data frame and the number of data bits per data frame divided by the maximum distance in metres times the data bit rate (the payload) is limited to 1.6.

Preferred embodiments of the present invention seek to overcome the above disadvantages of the prior art.

According to a first aspect of the present invention, there is provided a method of transmission of data messages between a plurality of stations interconnected by a bus line, wherein each said message includes a frame portion representing content and priority information of the data message and a data portion representing data to be transmitted, the method comprising the steps of causing at least one said station to transmit a data message on to the bus line such that said frame portion thereof is transmitted at a first data transmission rate, and the data portion thereof is transmitted at a second data transmission rate not less than said first data transmission rate, and adjusting said first and/or second data transmission rate in dependence on a signal quality determined for transmission on said bus line.

According to a second aspect of the invention, there is provided apparatus for transmitting data messages between a plurality of stations interconnected by a bus line, each of said data messages including a frame portion representing content and priority information of the data message and a data portion representing data to be transmitted, the apparatus comprising:

means for transmitting a data message on said bus line such that said frame portion thereof is transmitted at a first data transmission rate, and said data portion thereof is transmitted at a second data transmission rate not less than said first data transmission rate; and

means for adjusting said first and/or second data transmission rate in dependence on signal quality determined for transmission on said bus line.

The present invention is based on the very surprising discovery that by transmitting the data portion of a data message at a second data transmission rate which may be higher than the first data transmission rate at which the frame portion of the message is transmitted, the rate of transmission of data can be significantly improved compared with the prior art, without significant lowering of the distances over which data can be reliably transmitted (which would be the case if the entire data message were to be transmitted at the second transmission rate). For example, whereas the payload for known arrangements is limited to 1.6, the payload for arrangements embodying the present invention can be as high as 102.4.

Further, adjustable data rate transmission provides the advantage of enabling the network to automatically adjust itself to the first and second data transmission rates which provide the most advantageous balance between speed and reliability of transmission.

In a preferred embodiment, at least one further station transmits onto the bus line an acknowledgement signal indicating receipt of a said data message.

Preferably, at least one said station transmits a further said data message in response to transmission of a said acknowledgement signal.

This provides the advantage that further messages can be transmitted onto the network immediately after the previous message is correctly received.

More preferably, a said message is re-transmitted if no acknowledgement signal is received.

Yet more preferably, an error message is generated prior to re-transmission of said message.

In a preferred embodiment, said first and/or second data transmission rate is adjusted in response to the frequency of generation of said error messages. In such an embodiment, signal quality may be determined by the frequency of generation of said error messages.

In another embodiment, the frequency of received messages comprising an error is determined and the first and/or second data transmission rate is adjusted in dependence on said frequency. Thus, the signal quality is determined by the quality of the received messages.

Preferably, received signal strength is determined, and said first and/or second data transmission rate is adjusted in dependence on the received signal strength alone or in combination with the frequency of received data messages comprising an error.

Suitable means for determining errors is a Cyclic Redundancy Checker. A processor may be configured to determine the adjustment of the first and/or second data transmission rate.

Suitably, the processor is configured by a computer program to implement the embodiments of the invention. The computer program may be supplied on any suitable carrier medium such as magnetic storage media, optical storage media, solid-state storage media or provided over a communications carrier medium such as a radio frequency carrier or optical carrier signal.

Suitably, said frame portion contains information representing a station to which the message is directed.

This provides the advantage of enabling the network to be arranged such that only an addressed node or nodes responds to a particular message.

The frame portion may contain information representing the size of the corresponding data portion.

The second data transmission rate may be an integral multiple of said first data transmission rate.

A preferred embodiment of the invention will now be described, by way of example only and not in any limitative sense, with reference to the accompanying drawings, in which;

Figure 1 is a prior art data message;

Figure 2 is a remote frame for use in conjunction with the data message of Figure 1;

Figure 3 is an error frame for use in conjunction with the data message of Figure 1 and remote frame of Figure 2;

Figure 4 is a data message for use in a message embodying the present invention;

Figures 5A and 5B are a flow diagram showing the switching between the first and second data transmission rates of the method embodying the present invention;

Figure 6 is a block diagram of apparatus embodying the present invention; and

Figure 7 illustrates an implementation of an embodiment of the present invention.

Referring to Figure 4, a data frame for use in a method embodying the present invention has a start of frame 201, arbitration field 202 containing an identifier 203, RTR bit 204 substitute remote request bit 205 and identifier extension bit 206. These features operate in a similar manner to the corresponding features of the prior art data frame of Figure 1, with the exception that the arbitration field 203 may contain information regarding the transmit and receive node

identification, the size of data field 208 and the rate of transmission of the data contained in the data field 208.

The message also has a control field 207 which includes a data length code (DLC), the fourth bit of which may contain information regarding the size of the data field 208. The data field may be increased in size from 8 bytes in the prior art data field to 2048 bytes. If the rate of transmission F2 of the data in the data field 208 is an integral multiple of the rate of transmission of the data in the arbitration field 203 and control field 207, the multiplier may be set by the unused r0 and r1 bits of the control field 207. F1 bit rates are typically from 10Kbit to 1Mbit, and F2 bit rates are typically from 10Kbit to 8Mbit, although these bit rates may be changed arbitrarily depending on the particular construction of the network.

When the network is initially set up, the user may configure the F1 and F2 bit rates to particular values, and then by monitoring the rate of production of error frames during test transmissions determine the most reliable F1 and F2 bit rates to set for the particular network. A table containing a guideline for the initial settings may be provided, the table based upon the lengths of cable in the network. A test program to automate the task of setting F1 and F2 may also be provided, and these settings may then be stored in a non-volatile memory and thus be available for reuse each time the device is switched on.

A device containing a node operating using the method of the present invention may use a low level device driver to automate the task of setting F1 and F2. By repeatedly running the program of the low level device driver during a network session, the node can update the F1 and F2 bit rates held in the non-volatile memory to higher or lower values, depending upon the signalling conditions on the physical network at that

~~8~~ 9

time. This ensures that transmission bit rates are optimised adaptively for reliability and speed.

The embodiment described above includes in the arbitration field 202 a number of coded bits to identify the transmitting node and the identity of the intended receiving node or nodes. When all nodes receive the data frame, they compare the bits in the arbitration field 202 with the bits and their message address filter (as will be familiar to persons skilled in the art) to determine whether the data frame is addressed to them or not. If not, they switch to a passive mode, which ensures that only the node that the message is intended for will acknowledge the message if it is received without error. The transmitter may then determine that the message was received by the correct node, without error, and not simply by just any node on the network.

The 4 bit data length code within the control field 207 has seven unused values in the prior art arrangement discussed with reference to Figures 1 to 3 (9 to F hexadecimal). In the present invention, these unused values can be used to indicate a number of bytes in the data field as shown in Table 1 below:

<u>DLC Value in Hex</u>	<u>Data Field Length in Bytes</u>
0 to 8	0 TO 8
9	32
A	64
B	128
C	256
D	512
E	1024
F	2048

An alternative method of indicating the number of bytes in the data field 208 may be to use any of the 29 bits available in the identifier 203 in a predetermined pattern. This

alternative method may be used to increase the number of different data field bytes available to the user.

As pointed out above, the 2 reserved bits in the control field 207 may be used to indicate that the data transmission rate F2 of the data field 208 is an integral multiple of the data transmission rate F1 of the arbitration field 202 and control field 207. This may be carried out according to Table 2 below:

<u>Control Field r1</u>	<u>r0</u>	<u>Multiplier</u>	<u>F2 Bit Rate</u>
0	0	1	F1
0	1	2	2 x F1
1	0	4	4 x F1
1	1	8	8 x F1

An alternative method of indicating the bit rate F2 may be to use any of the 29 bits available in the identifier 203 in a predetermined pattern.

Referring to Figures 5A and 5B, which show a flow chart relating to the method of switching from data transmission rate F1 to F2 and vice versa, frame headers and footers are transmitted at the F1 bit rate, as shown in Figure 4. Before a frame is transmitted, the transmit clock of the relevant transmitter checks a register in a non-volatile memory containing the current F1 bit rate value, and the transmit clock is set to this value for all frame bits. In particular, the transmit sequence begins at Step 501, and if the start of frame portion 201 has begun at Step 502, a counter A is started at 503, otherwise the transmitter returns to Step 502.

After the counter A has started, it is determined at Step 504 whether the counter A has reached the last bit of the control field 208. When the counter detects that the last bit of the control field 208 has been sent, the transmit clock then checks

~~-10-~~ 11

a register in non-volatile memory containing the current F2 bit rate value and the transmit clock is then changed to F2 at Step 505. A counter B is started at Step 506, and when the counter detects at Step 507 that the last CRC bit has been sent, the transmit clock is reset to F1 at Step 508 for the remainder of the frame.

When an acknowledgement bit has been received at Step 509, the end frame portion is sent at Step 510, and a determination is made at Step 511 whether another frame is to be sent. If another frame is to be sent, the process returns to Step 501. If, on the other hand, no acknowledgement bit is received at Step 509, an error frame is sent at Step 512 and after waiting six times the F1 bit period at Step 513, the process returns to Step 501. If no other frame is to be sent at Step 511, the apparatus waits for the next transmit sequence to start at Step 514, and when the next transmit sequence starts at Step 515, the apparatus returns to Step 501.

An example of apparatus for a node or station capable of updating the F_1 and F_2 bit rates held in the non-volatile memory to higher or lower values, depending on the signalling conditions of the network will now be described with reference to Figure 6 of the drawings.

In accordance with an embodiment of the invention, a network node or station comprises apparatus 600 as illustrated in Figure 6. The apparatus 600 resides in the receive side of the network node.

Receive (RX) channel 602 input to apparatus 600, comprises a plurality of receive channels $604_1 \dots 604_n$ ($RXCH_1 \dots RXCH_n$) network for each network node. In this example, each node includes a discrete multi-tone transmitter to transmit data messages using frequency diversity. A plurality of Received Signal Strength Indicators $606_1 \dots 606_n$ ($RSSI_1 \dots RSSI_n$) are derived from respective receive channels $604_1 \dots 604_n$, and input to an n channel demultiplexor (MUX 608). The output of MUX 608 is coupled to Analogue to Digital Converter (ADC) 610, which converts the varying analogue voltage present at the time of conversion on each of the inputs into the digital domain of 8 bits or more. N channel MUX 608 and ADC 610 are synchronised to a clock signal 611.

The ADC 610 output for each RSSI $606_1 \dots 606_n$ is fed to a decision block 612 and to an RSSI register 614. The decision block 612 determines the channel having the greatest RSSI and outputs the result to Channel Selector 616.

A plurality of serial data bit streams $618_1 \dots 618_n$ comprising message frames and corresponding to respective receive channels $604_1 \dots 604_n$ are input to respective Cyclic Redundancy Checkers (CRCs) $620_1 \dots 620_n$. The cyclic redundancy (CR) bits transmitted in the CRC field of the point to point data frame for each channel, for example, are compared with the CR bits calculated in the corresponding CRC $620_1 \dots 620_n$ for the transmitted data. When the CR comparator in respective CRCs $620_1 \dots 620_n$ outputs a TRUE value it decrements 1 or more from a corresponding value held in an accumulator 622 and for a FALSE value it increments the value. In a particular example, signals representative of an increment or decrement are sent over respective signal lines $624_1 \dots 624_n$ and $626_1 \dots 626_n$. Accumulator 602 functions as a bit error rate counter.

An output of accumulator 622 is fed to channel selector 616 and another output is fed to an error register 628.

Channel selector 616 has an output coupled to Channel Switch 630. Based on values received from the channel selector 616. Channel selection is determined by looking for the best combination of high RSSI and low BER for each channel. Channel switch 630 switches one of the plurality of data streams $618_1 \dots 618_n$ to its output 632. The output data stream is termed "Best Data Bit Stream" 634 and is fed to a baseband processor 636 of the node apparatus 600.

The apparatus 600 also includes a processor 638 such as a microcontroller, microprocessor or some other programmable (intelligent) machine or combination thereof. Processor 638 reads the contents of RSSI register 614 and error register 628 from time to time as determined by software or programmed instructions for the processor. Preferably, the register contents are read on a regular periodic basis in order to determine a frequency at which errors and/or poor signal quality occur for the channels $604_1 \dots 604_n$. The processor determines the optimum F1, F2 and Data Code Length (DLC) i.e. the number of bytes to be transmitted in subsequent message frames, from the values read from register 614 and 628. Processor 638 adaptively configures F1, F2 and DLC to achieve optimum data payload transmission.

Processor 638 functions under computer program control which configures the processor to operate in accordance with the method of embodiments of the invention described above. In a preferred embodiment, the computer program is stored in solid state memory 640 associated with the processor. However, the computer program may be stored on any suitable medium such as magnetic disc or tape, or optical disc, and also may be transferred to the processor 638 over a communications carrier medium such as a radio frequency or optical signal carrier.

An example of an implementation of an embodiment of the invention will now be described with reference to Figure 7.

A Quicklogic PCI FPGA board 650 has been constructed which plugs into a PCI 652 slot on an IBM compatible personal computer (not shown). A Field Programmable Gate Array (FPGA) 654 comprises a state machine coded in VHDL to configure the FPGA 654 to implement the functions described above, together with the baseband processor and a microcontroller 656, which in this implementation is an Arizona Microchip PIC16C73. The microcontroller 656 includes an 8 bit ADC 610, RSSI register 614 and error register 628. PCI card 650 also includes a connector block 658 for coupling external signals to the PIC 656 and FPGA 654.

Suitably, the implementation may be on a 0.35 micron CMOS ASIC.

It will be appreciated by persons skilled in the art that the above embodiment has been described by way of example only and not in any limitative sense, and that various alterations and modifications are possible without departure from the scope of the invention as defined by the appended claims.

The scope of the present disclosure includes any novel feature or combination of features disclosed therein either explicitly or implicitly or any generalisation thereof irrespective of whether or not it relates to the claimed invention or mitigates any or all of the problems addressed by the present invention. The applicant hereby gives notice that new claims may be formulated to such features during the prosecution of this application or of any such further application derived therefrom. In particular, with reference to the appended claims, features from dependent claims may be combined with those of the independent claims and features from respective independent claims may be combined in any appropriate manner and not merely in the specific combinations enumerated in the claims.

CLAIMS

1. A method of transmission of data messages between a plurality of stations interconnected by a bus line, wherein each said message includes a frame portion representing content and priority information of the data message and a data portion representing data to be transmitted, the method comprising the steps of causing at least one said station to transmit a data message on to the bus line such that said frame portion thereof is transmitted at a first data transmission rate, and the data portion thereof is transmitted at a second data transmission rate not less than said first data transmission rate, and adjusting said first and/or second data transmission rate in dependence on a signal quality determined for transmission on said bus line.
2. A method according to claim 1, further comprising the step of causing at least one further station to transmit onto the bus line, an acknowledgement signal indicating receipt of a said data message.
3. A method according to claim 2, further comprising the step of causing at least one said station to transmit a further said data message in response to transmission of a said acknowledgement signal.
4. A method according to claim 2 or 3, further comprising the step of re-transmitting a said message if no acknowledgement signal is received.
5. A method according to claim 4, further comprising the step of generating an error message prior to re-transmission of said message.
6. A method according to claim 5, further comprising the step of adjusting said first and/or second data transmission rate in dependence on the frequency of generation of said error messages.
7. A method according to claim 1, further comprising the step of determining the frequency of received data messages comprising an error and adjusting said first and/or

second data transmission rate in dependence on the frequency of received data messages comprising an error.

8. A method according to claim 7, further comprising determining received signal strength for a data message and adjusting said first and/or second data transmission rate in dependence on said received signal strength determination in combination with said frequency of received data messages comprising an error.

9. A method according to any one of the preceding claims, wherein said frame portion contains information representing a station to which the message is directed.

10. A method according to any one of the preceding claims, wherein the frame portion contains information representing the size of the corresponding data portion.

11. A method according to any one of the preceding claims, wherein the second data transmission rate is an integral multiple of said first data transmission rate.

12. A method of transmission of data messages between a plurality of stations interconnected by a bus line, the method substantially as hereinbefore described with reference to Figures 4 and 5 of the accompanying drawings.

13. Apparatus for transmitting data messages between a plurality of stations interconnected by a bus line, each of said data messages including a frame portion representing content and priority information of the data message and a data portion representing data to be transmitted, the apparatus comprising:

means for transmitting a data message on said bus line such that said frame portion thereof is transmitted at a first data transmission rate, and said data portion thereof is transmitted at a second data transmission rate not less than said first data transmission rate; and

means for adjusting said first and/or second data transmission rate in dependence on a signal quality determined for transmission on said bus line.

14. Apparatus according to claim 13, further comprising means responsive to receiving a data message to transmit an acknowledgement signal on said bus line.

15. Apparatus according to claim 13 or 14, further comprising means responsive to an acknowledgement signal to transmit a further said data message.

16. Apparatus according to any one of claims 13 to 15, further comprising means for re-transmitting a message if no acknowledgement signal is received.

17. Apparatus according to claim 16, further comprising means for generating an error message prior to re-transmission of said message.

18. Apparatus according to claim 17, further comprising means for adjusting said first and/or second data transmission rate in dependence on the frequency of generation of said error messages.

19. Apparatus according to claim 13, further comprising means for determining whether a data message comprises an error.

20. Apparatus according to claim 19, said means for determining whether a data message comprises an error including a Cyclic Redundancy Checker.

21. Apparatus according to claim 20, further comprising an error register for holding a value indicative of the level of received messages comprising an error, and means for decrementing said value for a received data message determined not to comprise an error and incrementing said value for a received data message determined to comprise an error.

22. Apparatus according to claim 13 or any one of claims 19 to 21, further comprising a received signal strength measurement unit for measuring signal strength of a received data message.

23. Apparatus according to claim 22, further comprising a signal strength register for holding a value representative of received signal strength.

24. Apparatus according to claim 21, further comprising processing means for adjusting said first and/or second data transmission rate in dependence on the content of said error register.

25. Apparatus according to claim 23, further comprising processing means for adjusting said first and/or second data transmission rate in dependence on the content of said signal strength register.

26. Apparatus according to claim 25 and 24, said processing means configured to adjust said first and/or second data transmission rate in dependence on the content of said error register and said signal strength register.

27. Apparatus according to any one of claims 13 to 26, wherein said frame portion contains information representing a station to which the message is directed.

28. Apparatus according to any one of claims 13 to 27, wherein the frame portion contains information representing the size of a corresponding data portion.

29. Apparatus according to any one of claims 13 to 28, wherein the second data transmission rate is an integral multiple of said first data transmission rate.

30. Apparatus for transmitting data messages between a plurality of stations interconnected by a bus line, the apparatus substantially as hereinbefore described with reference to Figures 6 and 7 of the accompanying drawings.

31. A computer program comprising computer program means for configuring a processor to operate in accordance with any one of claims 1 to 12.

32. A computer program carrier medium, comprising a computer program according to claim 31.

33. A computer program carrier medium according to claim 32, comprising one of a magnetic storage medium, optical storage medium, solid state storage medium or communications carrier medium.

A B S T R A C T**DATA TRANSMISSION METHOD**

Apparatus and method for transmitting data messages between a plurality of stations interconnected by a bus line is disclosed, in which each message includes a frame portion and a data portion. The frame portion represents content and priority information of the data message, and the data portion represents data to be transmitted. At least one station transmits a data message having the frame portion transmitted at a first data transmission rate, and the data portion transmitted at a second data transmission rate which is not less than the first data transmission rate. The first and/or second data transmission rate is adjustable in dependence on a signal quality determined for transmission of a data message.

Figure 4

1/5

The Data Frame

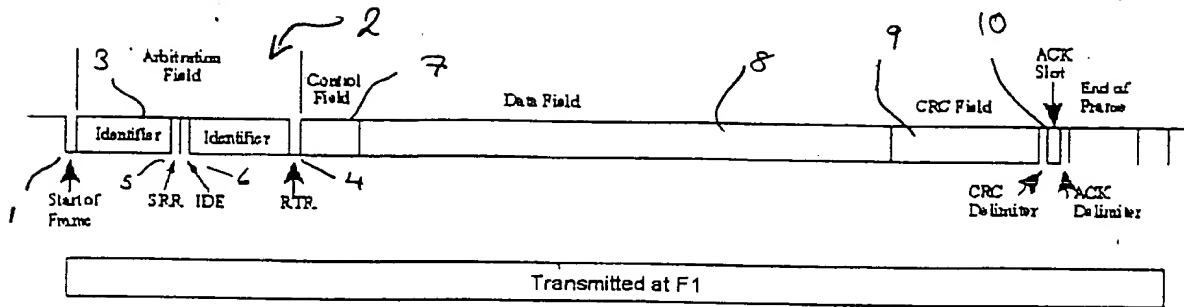


FIG 1

PRIOR ART

The Remote Frame

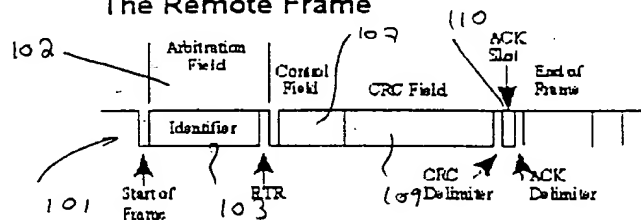


FIG 2

PRIOR ART

The Error Frame

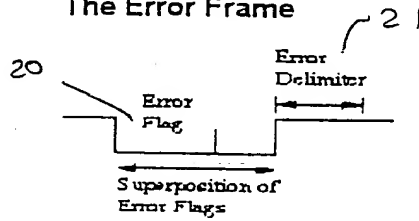


FIG 3

PRIOR ART

Point to Point Data Frame

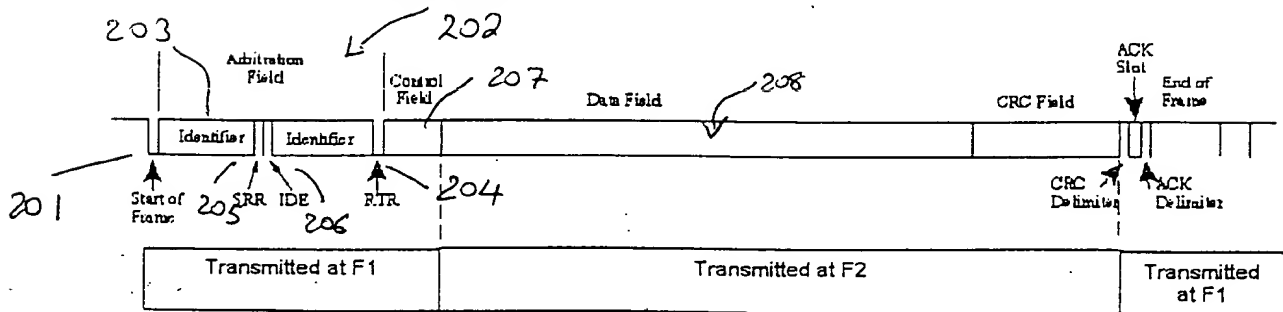


FIG. 4

THIS PAGE BLANK

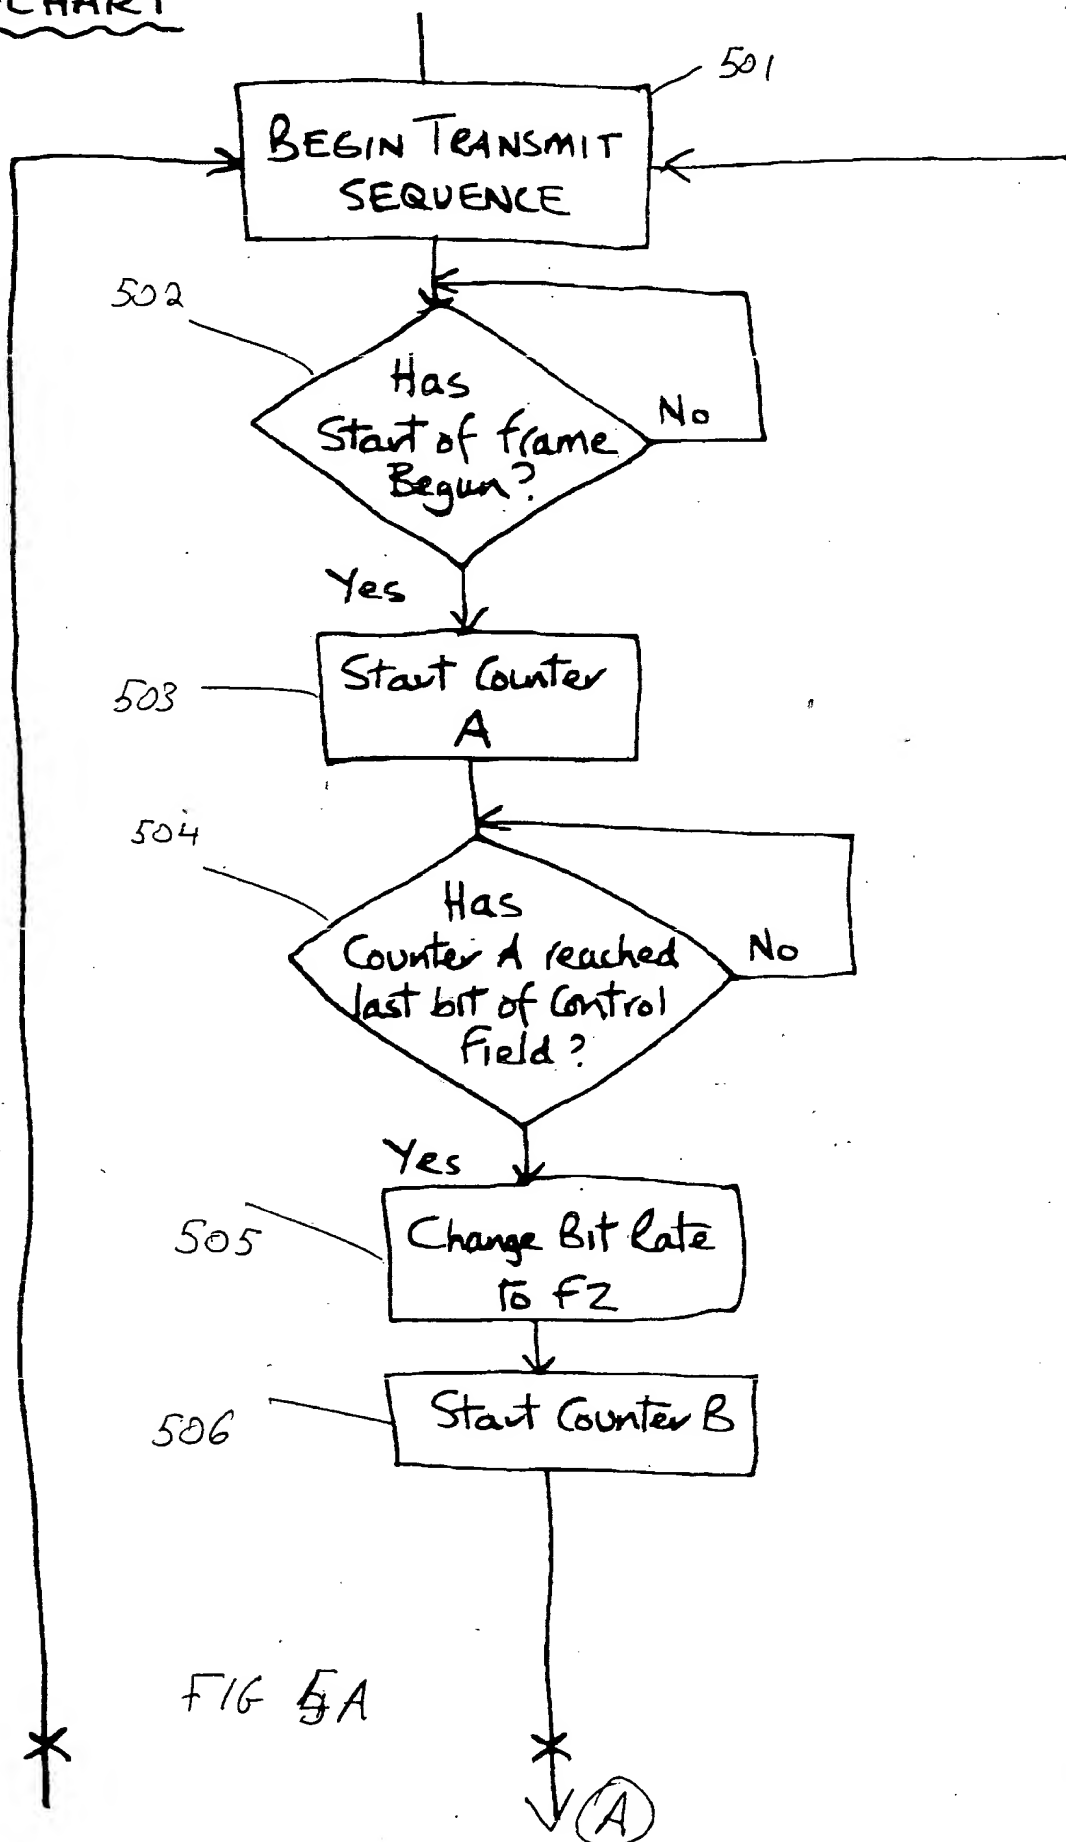
METHOD OF SWITCHING FROM F1 TO f2 etcFLOW CHART

FIG 5A

THIS PAGE BLANK (USPTO)

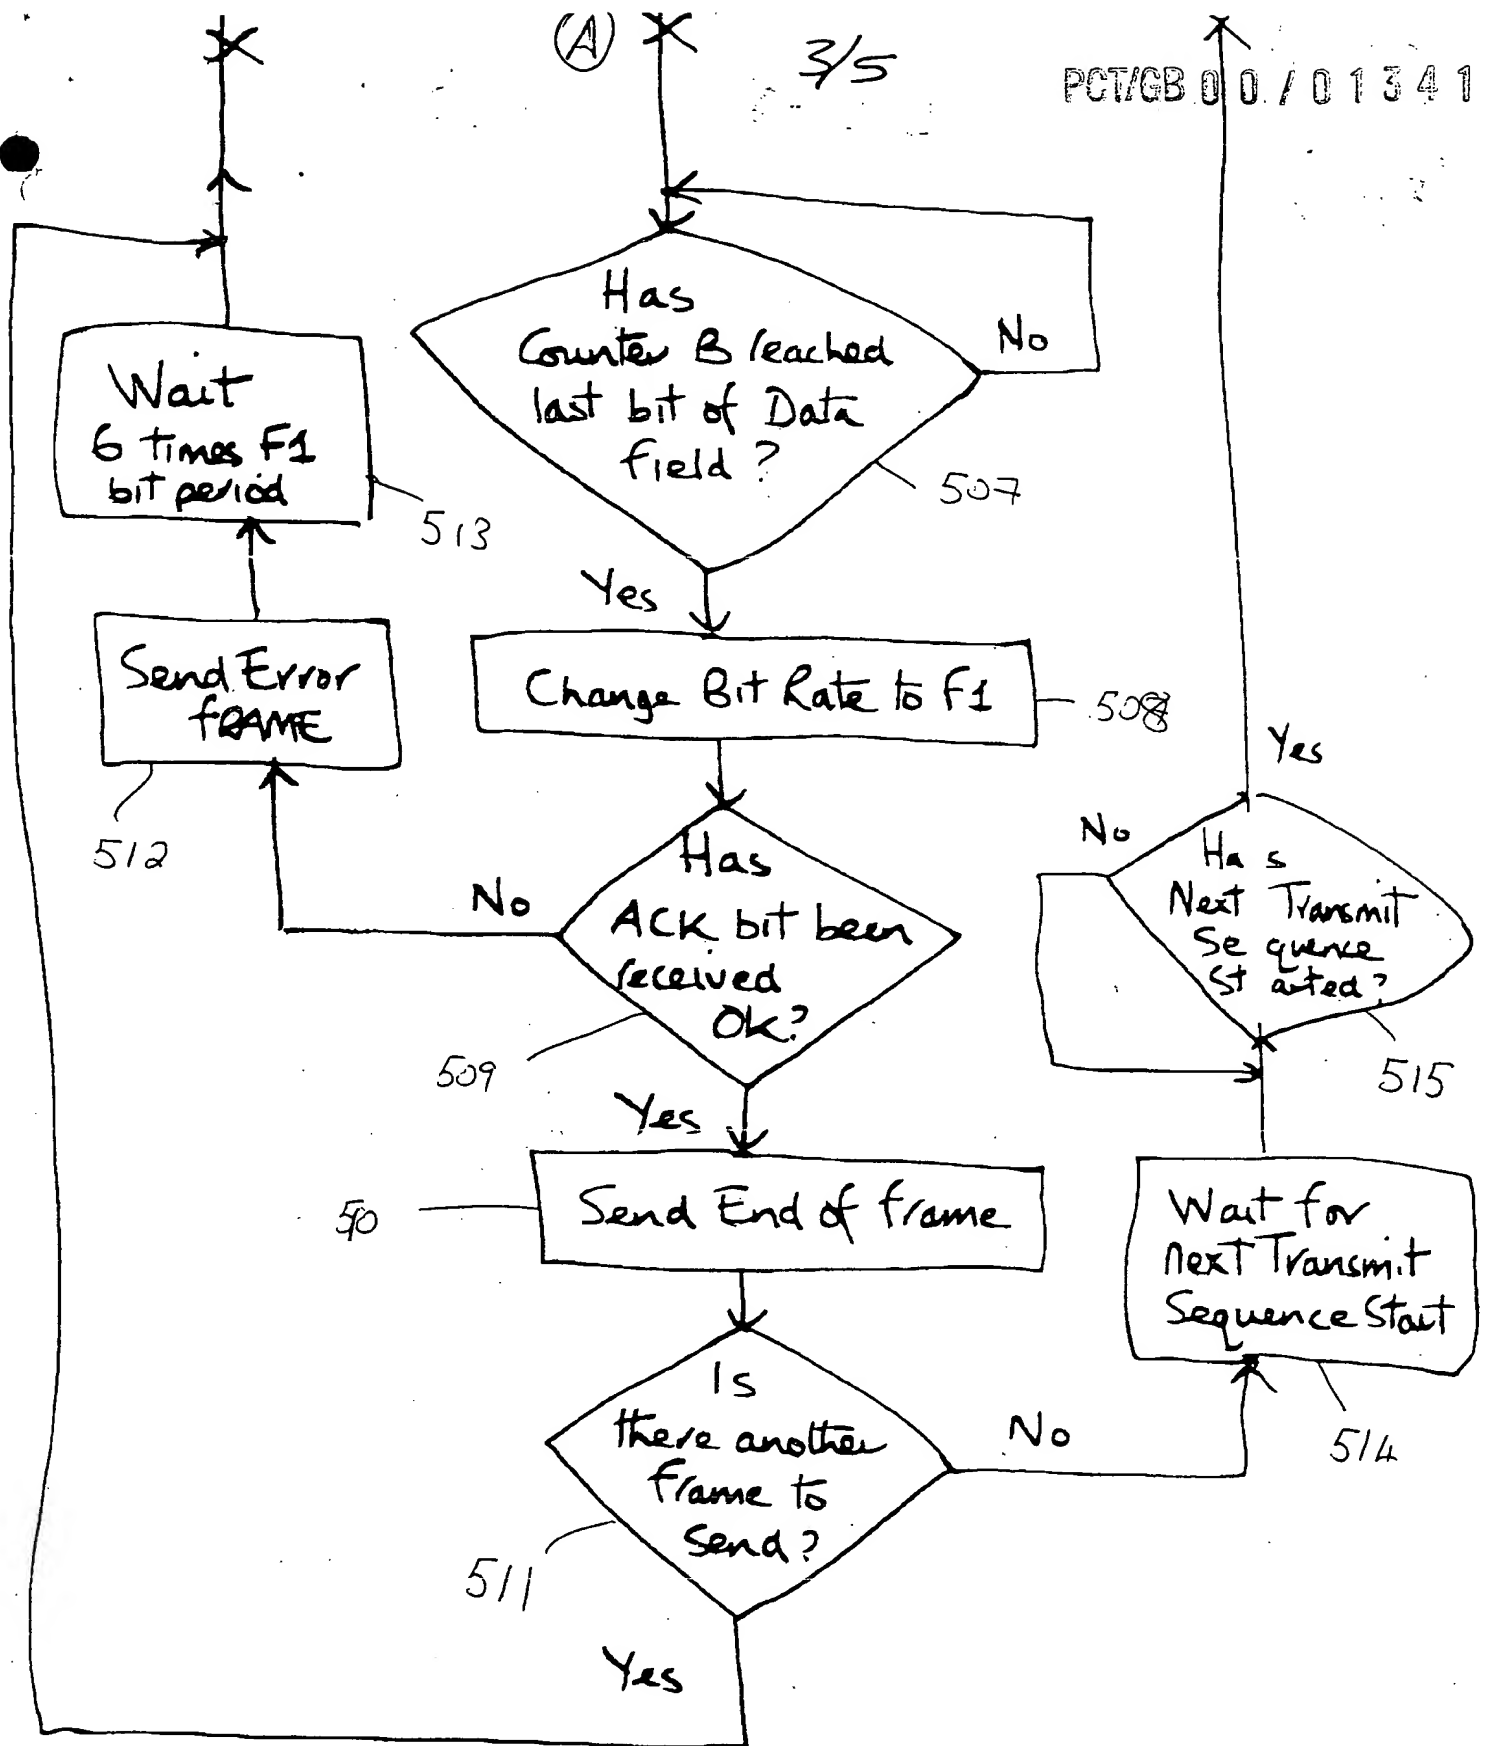


FIG. 5B

THIS PAGE BLANK (USPTO)

Rx CHANNEL 602

4/5

PCT/GB 00/01341

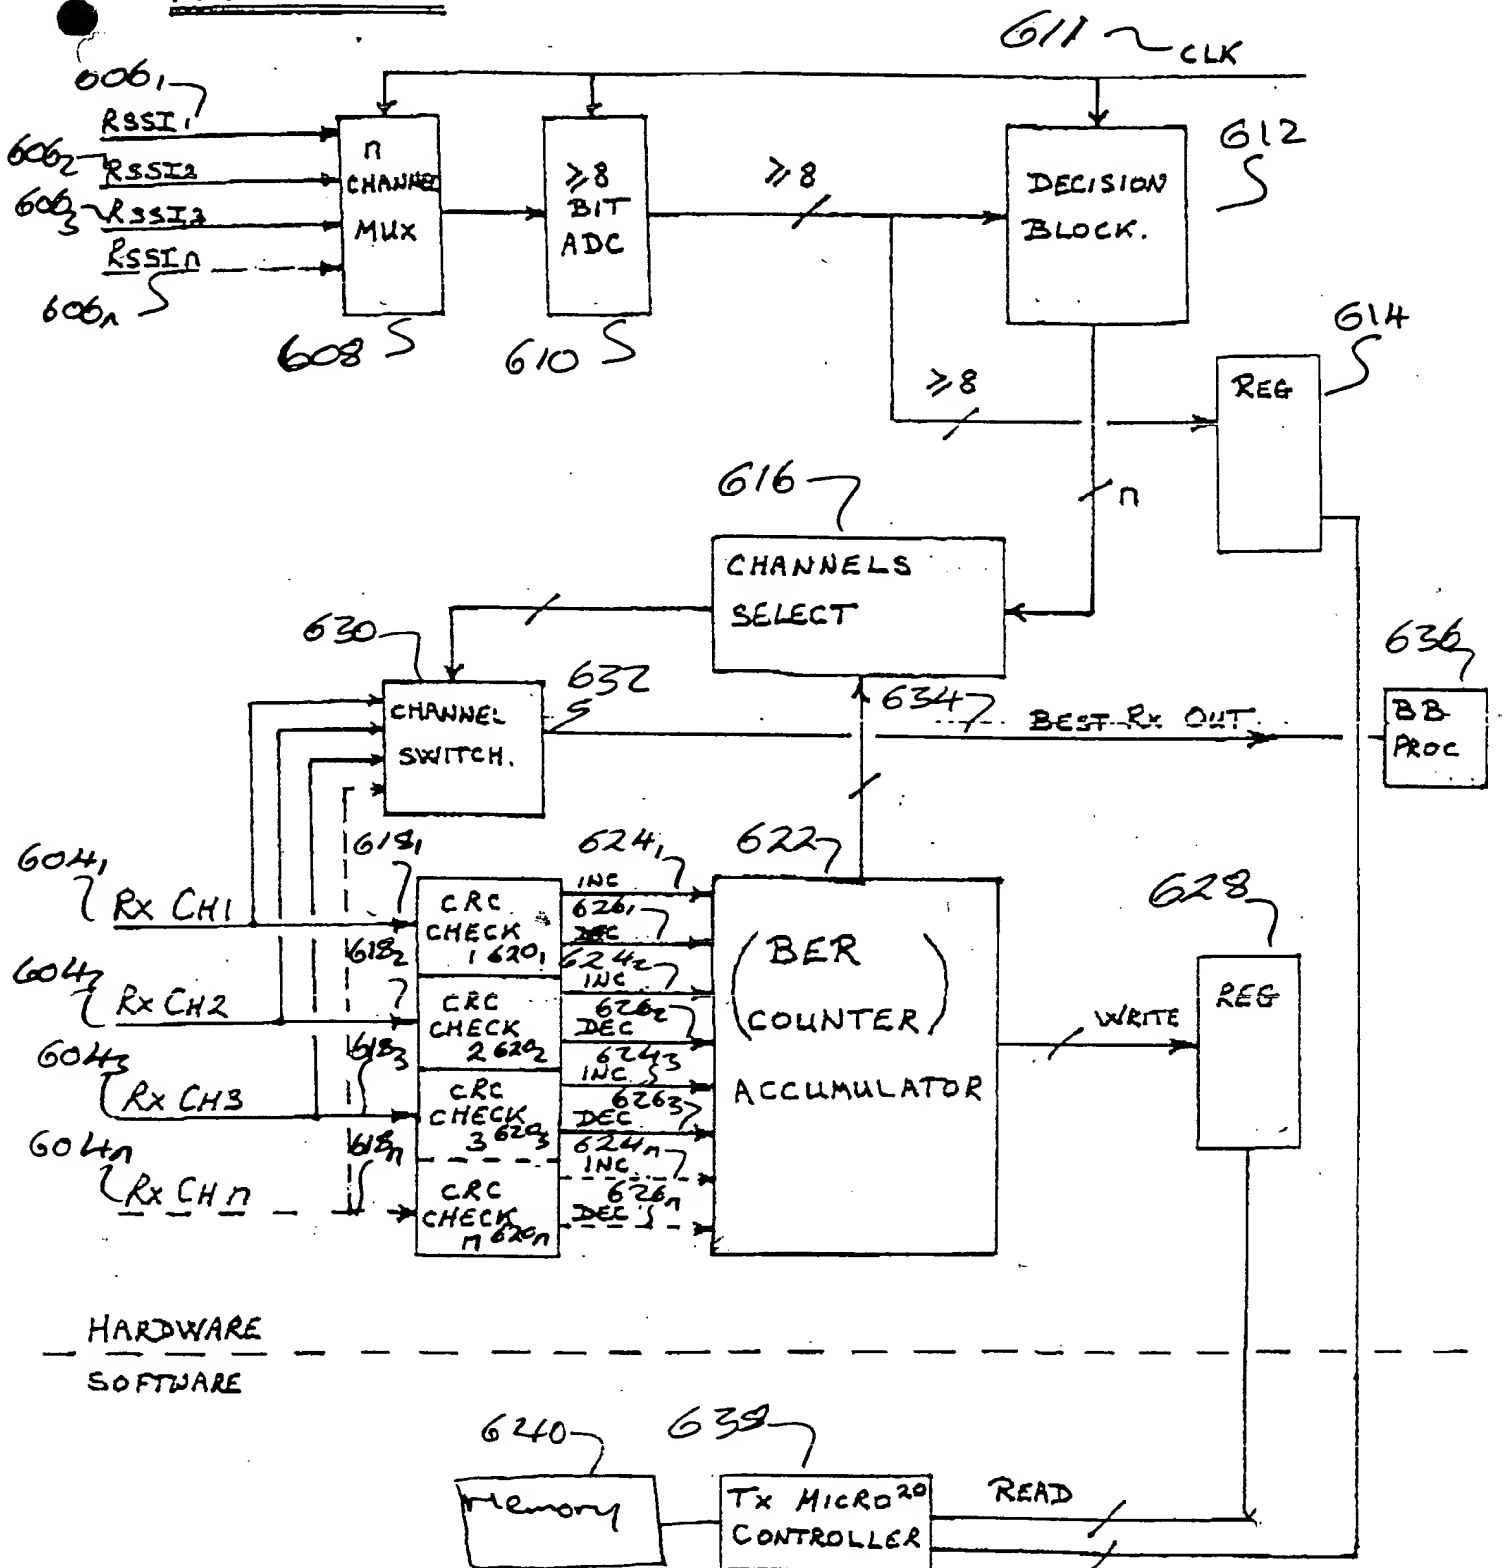


Fig. 6

THIS PAGE BLANK (USPTO)

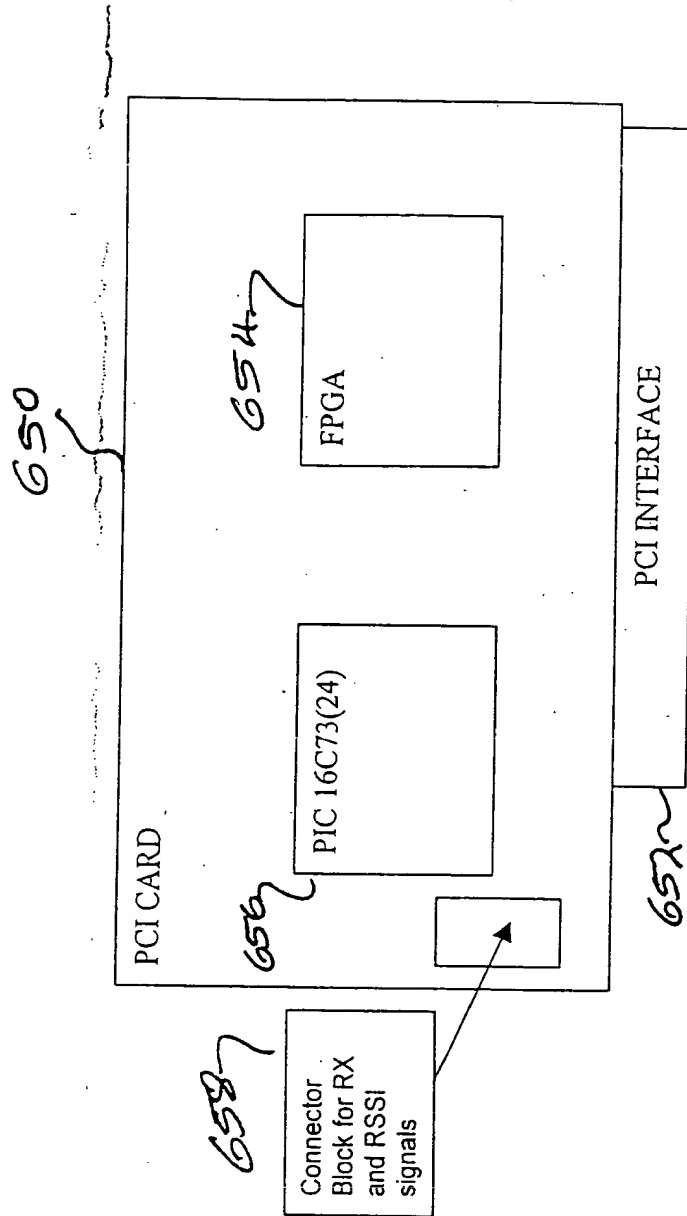


Fig. 7

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☒ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)